

US

09



© **hydrovane**

HV01 - HV45

Rotary Vane Air Compressors

Engineered to Save

Rotary Vane Compressors

Hydrovane – The best investment in compressed air technology you can make today!

The CompAir Hydrovane Series of Rotary Vane compressors are versatile, powerful and cost-effective. They can be found in trains, ships, engineering, distilling, brewing, packaging sites and in large and small industrial units throughout the world. In fact, they are the perfect business solution to meet your requirements for reliable, high quality compressed air. No matter what industry you operate in - there is a Hydrovane compressor that will meet your needs.

The low noise operation of Hydrovane air compressors means they can be installed right alongside your equipment. Most models are available either as open units or fitted with enclosure panels to reduce noise levels. For particularly sound sensitive sites, we can supply you with noise attenuation kits.

Hydrovane compressors are built to the highest level of specifications. They consistently meet the most demanding requirements with minimum maintenance, downtime or replacement parts.

Every machine undergoes rigorous testing before being shipped for installation. This means we ensure that the set-up of a Hydrovane air compressor is fast, cost-effective and hassle free. You can look forward to continuous running in the years to come.

In fact, many of the Hydrovane compressors CompAir built in the 1970's are still faithfully producing high quality air at this very moment!



The Rotary Vane Principle

The key to the success of the Hydrovane Series is the unique Rotary Vane principle.

- The compressor is driven by an electric motor. It operates at a very low speed, which ensures long component life and total reliability.
- The rotor is the only part that is continually moving, reducing potential component malfunction to a minimum.
- The rotor has slots where the sliding vanes are fitted. These vanes ride on a film of oil so that they move smoothly in and out of the slots.
- The rotor is positioned off center within the stator. The rotor is directly driven by the electric motor so that it rotates within the stator.
- During rotation, centrifugal force extends the vanes from their slots to form individual compression cells.
- As the cells move around the stator the trapped air is compressed and then expelled from the stator. The oil is separated from compressed air.
- This cool, clean, compressed air is then piped directly to your equipment without the need for a receiver.
- For applications that have fluctuating demands, regulated speed control ensures that you draw only on the energy required to meet your demands.

This means that you only use power and energy when you need it. You save money!





1. Air is drawn in through the intake valve.
2. Air is contained between the rotor and the stator wall.
3. Air is compressed by decreasing volume. Oil is continually injected to cool, seal and lubricate.
4. High pressure air passes into the primary oil separator.
5. Remaining traces of oil are removed in a final separator element, providing high quality air.
6. System air passes through the aftercooler, removing most of the condensate.
7. Oil is circulated by internal air pressure. It passes through an air-blast oil cooler and filter before being returned into the compressor.
8. Air flow is regulated by an inbuilt modulation system.

The “ABC’s” of the Hydrovane Compressor

A. Air Intake Valve

Precise control of delivery pressure.

B. Rotor and Stator

Fixed displacement means constant output.

C. Oil Injection

Long component life and reliable performance.

D. Primary Separation

Cyclonic action allows extended separator life.

E. Final Separator

Consistent top quality air.

F. Aftercooler


Standard equipment allowing optimum dryer sizing straight from the compressor.

G. Pressurized Oil Circulation

No oil pump means there’s nothing to fail, instant air circulation on start up - totally sealed system.

H. Modulating Servo Control

Only the air required by the system is compressed - minimum energy - minimum cost.

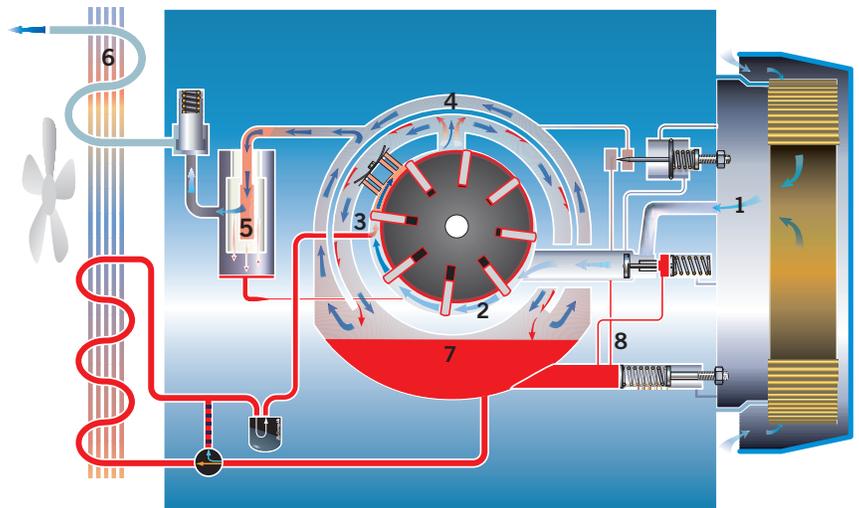

Hydrovane Control Systems

Automatic

Stop/start control, hours counter, operating mode selector switch, warning light and pressure gauge.


Regulated Speed

- “Supersoft” Start/Stop
- Automatic Stop/Start Control
- Customer Adjustable System Pressure
- Permanent Display Options
- Graphic Display of Supply Power, Motor Current, Motor Torque
- RS 485 Communication
- Built-In EMC Filter
- Easy to Install
- Easy to Operate

Regulated speed is ideal for sites with fluctuating air demands.

Regulated Speed Offers Energy Savings

Most air installations operate between 40% to 70% of full load capacity. A savings of over 50% in energy costs can be achieved by supplying compressed air according to demand. Some areas offer government subsidies and tax relief so the investment in a Regulated Speed Hydrovane Air Compressor can be self-financing! Your purchase becomes an investment that keeps on working - and saving you money well after you have passed the pay back point.

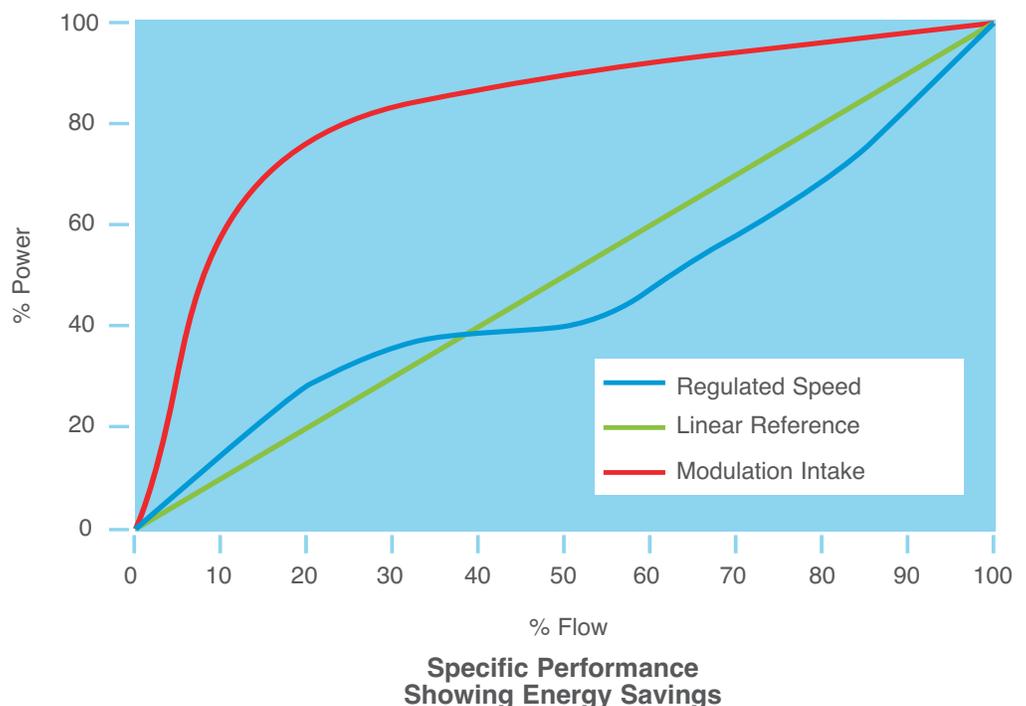



Hydrovane 11-22



Hydrovane 30-45



A full-range of Hydrovane kits are available to assist in the maintenance of your compressor.

Some Good Reasons Why You Should Invest in a Hydrovane Compressor

Rotary Vane Technology

Provides a consistent supply of high quality, pulse free air.

Direct Drive

No belts - nothing to fail and no power loss.

Slow Running Speed

Low noise, low stress, vibration-free operation.

Cast Iron Components

Long life, trouble-free, low maintenance and 24/7 running.

Bushes Not Bearings

Bushes last a lifetime; bearings need to be replaced.

Regulation Control/Automatic Start-Stop

Minimal energy is required to fulfill your air demands.

Thermistor Protection

Total protection of your compressor and motor from damage by over temperature.

Rigorous Testing

Guaranteed first time start-up.

Low Noise Level

People can work alongside a Hydrovane compressor without discomfort or risk.

115°F Ambient Capability

Suitable for installation in all climates.

Small Footprint

Can be installed alongside equipment taking up minimal space.

Ease of Installation

“Plug and Play” installation.

Total Accessibility

Quick and easy to maintain.

REVS

Reduced Energy Venting System on HV04-HV45.
Reduces Offload Power to 30%.

We stand behind our products!

We offer a 5-year extended warranty for your total peace of mind operation.

Model	CFM			Motor Power HP (kW)	Oil Capacity (gal.)	Noise Levels dB(A)	Air Outlet NPT	Dimensions Inches			Weight Lbs. (comp/HYPAC)	Available Voltages	Receiver Tank Capacity (gal.)	
	100 psi g	115 psi g	150 psi g					Length (comp/HYPAC)	Width (comp/HYPAC)	Height (comp/HYPAC)				
V01	6.7	-	5	2 (1.5)	1	65	3/8	30	11	18	130	***	30	
V04	23	-	18	5 (4)		72	1/2	42	24	24	300		80	
HV04*	24	-	20	5 (4)	1	66	3/4	27/68	19/18.75	41/64.18	410/900	200/3/60 208/3/60 230/3/60 460/3/60 575/3/60	80	
HV05*	32	-	25	7.5 (5.5)							410/902			
HV07*	44	-	35	10 (7.5)							434/953			
HV07RS*	0 - 46			10 (7.5)							449/959			460/3/60
HV11	-	61	-	15 (11)	1.85	69	3/4	32.5	27.6	54.7	847	**	-	
HV11RS	0 - 66										15 (11)	866		230/3/60 460/3/60
HV15	-	81	-	20 (15)							70	875		**
HV15RS	0 - 87											20 (15)		895
HV18	-	104	-	25 (18)	2	72	1	32.5	27.6	60	1,060	**	-	
HV18RS	0 - 110										25 (18)	1,118		230/3/60 460/3/60
HV22	-	127	-	30 (22)							73	1,090		**
HV22RS	0 - 137											30 (22)		1,146
HV30	-	182	-	40 (30)	5.6	73	1 1/2	43	35	63	1,889	**	-	
HV30RS	0 - 197										40 (30)	2,004		460/3/60
HV37	-	210	-	50 (37)							2,008	**		
HV37RS	0 - 228										50 (37)	2,151		460/3/60
HV45	-	259	-	60 (45)							2,072	**		
HV45RS	0 - 280										60 (45)	2,187		460/3/60

- * HYPAC is available with or without dryer (Weight and Dimen. Quoted with dryer)
- ** Voltage Available: 208/3/60, 230/3/60, 460/3/60, 575/3/60
- *** V01 and V04 Packages: 115/1/60, 208/1/60, 230/1/60, 208/3/60, 230/3/60, 460/3/60, 575/3/60
- **** RS models are rated and operate from 6 to 10 bar
- Shaded areas are vertical design



Hydrovane 04 (Receiver Mounted; Tripod Mounted Available)



Hydrovane 04-07RS HYPAC (Compressor, 80 gallon tank, dryer, and B Grade Filter)

Safety Features: Motor - Thermistors and Overloads, Compressor - Silicon Sensors, Emergency Stop, High Pressure Safety Valve. Lubricants: CompAir Rotary Vane Oils. Warranty: 12 Month On-Site Parts and Labor. Built-In Five Year Warranty for Nominated Countries. Ask Your Distributor for Further Details. Quality: CompAir UK Ltd Quality Management System Approved to BS EN ISO 9001. Registered Design.

Free Air Delivery (F.A.D) in accordance with ISO 1217.
Noise: Tested to Pneuop PN8NTC2.3.



© hydrovane

CompAir USA
130 Fox Drive
Piqua, Ohio 45356
United States of America

Telephone (937) 778-2500
Fax (937) 778-4123

www.CompAirUSA.com
Email: sales@compairusa.com

CompAir Canada
871 Cranberry Court
Oakville, Ontario L6L 6J7
Canada

Telephone (905) 847-0688
Facsimile (905) 847-8124

www.CompAir.ca
Email: info@compair.ca

Servivane

Av. Las Trojes #109 Col. Centro Bodegero Las Trojes
C.P. 37227
León Guanajuato.
Tel y Fax: +52 (477) 764 017 4 / (477) 764 017 3 / (477) 763 046 0

CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.

Brochure re-order ref: 98700-532NA
Revised 1/2009



CompAir is an ISO
9001 registered
company